


CONICAL ADHESIVE TAKEOFF — TA60

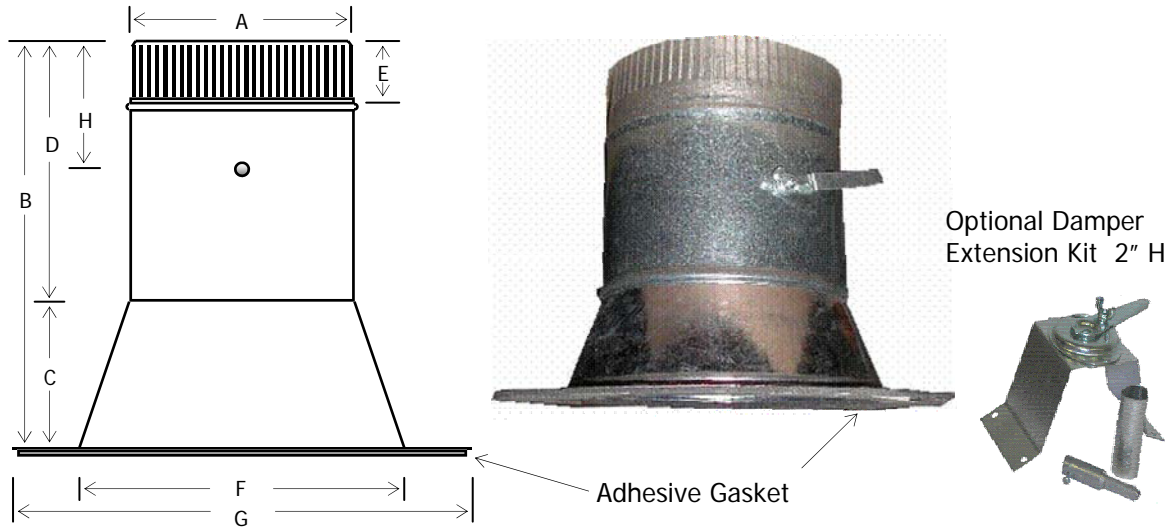

A	B	C	D	E	F	G	H	GA
4	9	3	6	1.75	6	8	3.875	28
5	9	3	6	1.75	7	9	3.875	28
6	9	3	6	1.75	8	10	3.875	26
7	9	3	6	1.75	9	12	3.875	26
8	9.25	3.25	6	1.75	10	12	3.875	26
9	10.25	4.25	6	1.75	12	14	3.875	26
10	9.25	3.25	6	1.75	12	14	3.875	26
12	9.25	3.25	6	1.75	14	17	3.875	26
14	9.75	3.75	6	1.75	16	19	3.875	26
16	9.75	3.75	6	1.75	18	21	3.875	26
18	9.75	3.75	6	1.75	20	23	3.875	26
20	13.75	7.75	6	1.75	22	25	3.875	26
22	16.75	10.75	6	1.75	24	27	3.875	26
24	11.75	5.75	6	1.75	26	29	3.875	26

Galvanized Steel, G30/40 coating standard, G90 available, Adhesive gasket

PART NUMBER DESIGNATIONS

TA60XX , TA60DXX, TA60DEXX

Where: XX = Diameter (04-24)

D = Damper (Single and dual hardware available)

E = Damper Extension 2" H

(Reinforced damper axis or 3/8" solid rod)

Options: Standard 28/26GA; 24GA and 22GA available

PROJECT: _____ COMPANY: _____ DATE : _____

LOCATION: _____ SUBMITTED BY: _____